

11/28/00

09722338-112800

Please type a plus sign (+) inside this box ☒Approved for use through 10/31/2002 OMB 0651-0032
U.S. Patent and Trademark Office, U.S. DEPARTMENT OF COMMERCE
Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.UTILITY
PATENT APPLICATION
TRANSMITTAL

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Attorney Docket No.

PAT 323-2

First Inventor

ZHANG, Hang et

Title

Dynamic Automatic ...

Express Mail Label No.

APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent application contents.

1. ☒ Fee Transmittal Form (e.g., PTO/SB/117)
(Submit an original and duplicate for fee processing)
2. ☐ Applicant claims small entity status.
See 37 CFR 1.27.
3. ☒ Specification [Total Pages 12] (preferred arrangement set forth below)
- Descriptive title of the invention
- Cross Reference to Related Applications
- Statement Regarding Fed sponsored R & D
- Reference to sequence listing, a table, or a computer program listing appendix
- Background of the invention
- Brief Summary of the Invention
- Brief Description of the Drawings (if filed)
- Detailed Description
- Claim(s)
- Abstract of the Disclosure
4. ☒ Drawing(s) (35 U.S.C. 113) [Total Sheets 3]
5. Oath or Declaration [Total Pages 2]
a. ☒ Newly executed (original or copy)
Copy from a prior application (37 CFR 1.63 (d))
(for continuation/divisional with Box 17 completed)
b. ☐ **DELETION OF INVENTOR(S)**
Signed statement attached deleting inventor(s) named in the prior application, see 37 CFR 1.63(d)(2) and 1.33(b).
6. ☐ Application Data Sheet. See 37 CFR 1.76

ADDRESS TO:

Assistant Commissioner for Patents
Box Patent Application
Washington, DC 20231

7. ☐ CD-ROM or CD-R in duplicate, large table or Computer Program (Appendix)
8. Nucleotide and/or Amino Acid Sequence Submission (if applicable, all necessary)
a. ☐ Computer Readable Form (CRF)
b. Specification Sequence Listing on:
i. ☐ CD-ROM or CD-R (2 copies); or
ii. ☐ paper
c. ☐ Statements verifying identity of above copies

ACCOMPANYING APPLICATION PARTS

9. ☒ Assignment Papers (cover sheet & document(s))
37 CFR 3.73(b) Statement ☒ Power of Attorney
10. ☐ English Translation Document (if applicable)
11. ☐ Information Disclosure Statement (IDS)/PTO-1449 ☐ Copies of IDS Citations
12. ☐ Preliminary Amendment
13. ☒ Return Receipt Postcard (MPEP 503) (Should be specifically itemized)
14. ☐ Certified Copy of Priority Document(s) (if foreign priority is claimed)
15. ☒ Other: Nonpublication Request 37 CFR 1.33(b)

17. If a CONTINUING APPLICATION, check appropriate box, and supply the requisite information below and in a preliminary amendment, or in an Application Data Sheet under 37 CFR 1.76:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No. _____
Prior application information Examiner Group I / Art Unit.

For CONTINUATION OR DIVISIONAL APPS only: The entire disclosure of the prior application, from which an oath or declaration is supplied under Box 5b, is considered a part of the disclosure of the accompanying continuation or divisional application and is hereby incorporated by reference. The incorporation can only be relied upon when a portion has been inadvertently omitted from the submitted application parts.

18. CORRESPONDENCE ADDRESS

☒ Customer Number or Bar Code Labelor ☐ Correspondence address below

Name

26123

PATENT TRADEMARK OFFICE

Address

City

State

Zip Code

Country

Telephone

Fax

Name (Print/Type)

Leslie Anne Kinsman

Registration No. (Attorney/Agent)

45,291

Signature

Date

Nov. 27, 2000

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Box Patent Application, Washington, DC 20231.

FEE TRANSMITTAL for FY 2001

Patent fees are subject to annual revision

TOTAL AMOUNT OF PAYMENT (\$) 750.00

Complete if Known

Application Number
Filing Date
First Named Inventor ZHANG, Hang et al.
Examiner Name
Group Art Unit
Attorney Docket No. PAT 323-2

METHOD OF PAYMENT

1. ☐ The Commissioner is hereby authorized to charge indicated fees and credit any overpayments to:
- Deposit Account Number 501593
Deposit Account Name Borden Ladner Gervais LLP
- ☒ Charge Any Additional Fee Required Under 37 CFR 1.16 and 1.17
☐ Applicant claims small entity status. See 37 CFR 1.27

2. ☒ Payment Enclosed:
☒ Check ☐ Credit card ☐ Money Order ☐ Other

FEE CALCULATION

1. BASIC FILING FEE

Large Entity	Small Entity	Fee Code	Fee Code	Fee Description	Fee Paid
101	710	201	355	Utility filing fee	710.
106	320	206	160	Design filing fee	
107	490	207	245	Plant filing fee	
108	710	208	355	Reissue filing fee	
114	150	214	75	Provisional filing fee	

SUBTOTAL (1) (\$) 710.00

2. EXTRA CLAIM FEES

Total Claims	Extra Claims	Fee from below	Fee Paid
16	-20** =	---	---
3	-3** =	---	---
Multiple Dependent			---

Large Entity	Small Entity	Fee Code	Fee Code	Fee Description
103	18	203	9	Claims in excess of 20
102	80	202	40	Independent claims in excess of 3
104	270	204	135	Multiple dependent claim, if not paid
109	80	209	40	** Reissue independent claims over original patent
110	18	210	9	** Reissue claims in excess of 20 and over original patent

SUBTOTAL (2) (\$) 0.00

**for number previously paid, if greater; For Reissues, see above

FEE CALCULATION (continued)

Large Entity	Small Entity	Fee Code	Fee Code	Fee Description	Fee Paid
105	130	205	65	Surcharge - late filing fee or oath	
127	50	227	25	Surcharge - late provisional filing fee or cover sheet	
139	130	139	130	Non-English specification	
147	2,520	147	2,520	For filing a request for ex parte reexamination	
112	920*	112	920*	Requesting publication of SIR prior to Examiner action	
113	1,840*	113	1,840*	Requesting publication of SIR after Examiner action	
115	110	215	55	Extension for reply within first month	
116	390	216	195	Extension for reply within second month	
117	890	217	445	Extension for reply within third month	
118	1,390	218	695	Extension for reply within fourth month	
128	1,890	228	945	Extension for reply within fifth month	
119	310	219	155	Notice of Appeal	
120	310	220	155	Filing a brief in support of an appeal	
121	270	221	135	Request for oral hearing	
138	1,510	138	1,510	Petition to institute a public use proceeding	
140	110	240	55	Petition to revive - unavoidable	
141	1,240	241	620	Petition to revive - unintentional	
142	1,240	242	620	Utility issue fee (or reissue)	
143	440	243	220	Design issue fee	
144	600	244	300	Plant issue fee	
122	130	122	130	Petitions to the Commissioner	
123	50	123	50	Processing fee under 37 CFR 1.17(g)	
126	180	126	180	Submission of Information Disclosure Stmt	
581	40	581	40	Recording each patent assignment per property (times number of properties)	40.
146	710	246	355	Filing a submission after final rejection (37 CFR § 1.129(a))	
149	710	249	355	For each additional invention to be examined (37 CFR § 1.129(b))	
179	710	279	355	Request for Continued Examination (RCE)	
169	900	169	900	Request for expedited examination of a design application	

Other fee (specify)

*Reduced by Basic Filing Fee Paid SUBTOTAL (3) (\$) 40.00

SUBMITTED BY

Name (Print/Type) Leslie Anne Kinsman
Signature [Signature]

Registration No. (Attorney/Agent) 45,291

Complete if applicable

Telephone 613-237-5160
Date Nov 27, 2000

WARNING: Information on this form may become public. Credit card information should not be included on this form. Provide credit card information and authorization on PTO-2038.

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231.

008211-8332260

DYNAMIC AUTOMATIC RETRANSMISSION REQUEST IN WIRELESS ACCESS
NETWORKS

FIELD OF THE INVENTION

5 The present invention relates generally to improvements in wireless communications. More particularly, the present invention relates to a method and system for an automatic retransmission request (ARQ) scheme that dynamically adapts the retransmission parameters for each packet in response to predetermined conditions, such as the per packet quality of service (QoS).

10 **BACKGROUND OF THE INVENTION**

15 The design of current third generation (3G), and enhanced 3G, wireless access networks is driven by the need for high speed internet access. Increasingly, consumers are moving to wireless communications for the delivery of services and applications using TCP/IP (Transmission Control Protocol/Internet Protocol). This trend is growing with the increase in internet-enabled wireless devices available to users, including cellular telephones, Personal Digital Assistants (PDAs), and other devices. The applications that are now available or contemplated for wireless devices include access to the World Wide Web, video telephony, voice over IP, e-mail, etc.

20 However, wireless networks, whether fixed or mobile, suffer certain disadvantages over their wired counterparts, particularly in the delivery of IP applications. This is mainly due to the significantly greater lost or dropped packets in wireless networks, as compared to wireline. Such losses can be largely attributed to the changeable quality of the channel over which IP packets are sent. For example, the wireless channel condition is highly dependent
25 on the location of the wireless terminal in relation to its base station, and extraneous external or atmospheric interference. The combination of these factors can have a significant effect on the delivery of data services over wireless channels.

30 An automatic retransmission request (ARQ) scheme is generally implemented in a wireless access network to enable packets that have not been received at a receiver to be retransmitted. Current 3G wireless link ARQ schemes are NAK-based schemes with static retransmission parameters determined on a per connection, or burst, basis. Such systems

include the cdma2000 1xRTT standard, the Universal Mobile Telecommunications System (UMTS), High Data Rate (HDR), and Enhanced Data Rates for GSM Evolution (EDGE). For example, a static ARQ may support two rounds of retransmissions, and two retransmissions in each round, to meet a desired packet loss rate for the link. Such a static ARQ scheme has two main disadvantages for supporting packet applications. First, resources can be wasted. For example, if the first retransmission in a round has been correctly received, the second retransmission is a waste of radio resources. Secondly, there is a possibility that the delay introduced by retransmission will be longer than the tolerable packet delay for a given packet. This results from the fact that a static ARQ processes all packets in the same way, regardless of per packet QoS. This can result in intolerable delay for certain packets. For example, if a packet's delay margin does not permit two rounds of retransmission, the above static ARQ does not support the required QoS for that packet.

Therefore, to better support high speed wireless internet access, it is desirable that the ARQ design should support per packet QoS, instead of using static parameters, where the per packet QoS is, for example, a function of each packet's delay bound. In this way, system resources can be more efficiently utilized as compared to systems using a static ARQ scheme, and system capacity can be increased as a result.

SUMMARY OF THE INVENTION

It is an object of the present invention to obviate or mitigate at least one disadvantage of previous systems and methods for retransmitting packets in wireless access network. It is a particular object of the present invention to provide a system and method that permits automatic retransmission requests that are dynamically adapted to the per packet QoS.

In a first aspect, the present invention provides a method for retransmitting packets in a wireless communications network. The method begins with the receipt of a retransmission request for a packet. Typically, this retransmission request is in the form of a negative acknowledgement message. The packet has available at least one retransmission round, and has an available number of retransmissions. The available retransmission rounds are estimated as a function of the per packet QoS, such as the packet's delay bound, while the total number of retransmissions are estimated as a function of the wireless link QoS, such as the frame error rate. Depending on the number of retransmission rounds available to the

packet, as determined by the round trip time over the wireless link, and the packet's total remaining number of retransmissions, retransmission parameters are determined. The packet is then retransmitted in accordance with the determined retransmission parameters. The available retransmissions for the packet are then updated. For example, when the packet delay margin provides sufficient time for more than one retransmission round, as determined by the estimated round trip time over a given link, only one retransmission is made, and a counter associated with the retransmission parameters is updated accordingly. When there is only sufficient time left to do one retransmission round, multiple retransmissions are made, up to a number that is equal to the remaining total number of retransmissions.

In another aspect, there is provided a radio link protocol engine that provides retransmission parameters for a packet having a predetermined per packet QoS. A radio link protocol automatic retransmission request engine determines retransmission parameters for the packet based on the predetermined per packet QoS and a predetermined wireless link QoS. A buffer stores the retransmission parameters for the packet. At each retransmission round that the packet undergoes, the retransmission parameters are recalculated and updated, as required.

In a further aspect, there is provided a wireless access network including the above-described radio link protocol automatic retransmission request engine and a scheduler for scheduling the packet for transmission over the wireless link.

Other aspects and features of the present invention will become apparent to those ordinarily skilled in the art upon review of the following description of specific embodiments of the invention in conjunction with the accompanying figures.

BRIEF DESCRIPTION OF THE DRAWINGS

Embodiments of the present invention will now be described, by way of example only, with reference to the attached Figures, wherein:

Fig. 1 is a block diagram of a wireless network configuration for communication between a wireless terminal and an application server;

Fig. 2 is a more detailed block diagram of the wireless access network and terminal of Fig. 1; and

Fig. 3 is a schematic illustrating the operation of the method and system of the present invention.

DETAILED DESCRIPTION

5 Generally, the present invention is a method for providing dynamic ARQ, on a per packet basis, in a wireless telecommunications access network. By taking into consideration both per packet QoS based on, for example, packet delay bound, and potential delays caused by retransmission, this invention proposes a dynamic NAK-based ARQ scheme that dynamically adapts the retransmission parameters to the per packet QoS to provide improved
10 radio link quality, particularly for non-delay sensitive services and applications. The ARQ parameters that are dynamically adjusted can include the number of retransmission rounds, and the number of retransmissions in each round.

It is assumed that link adaptation is available in the wireless access network. Link adaptation is a protocol whereby the physical layer link modulation and code rate are dynamically changed based on current channel condition for each terminal, in order to satisfy a required wireless link QoS, determined according to a desired frame error rate (FER), bit error rate (BER) or block error rate (BLER), and to maximize data throughput. The result of link adaptation is the link mode for the channel.

20 **Fig. 1** shows a typical wireless network configuration linking a number of wireless terminals **100** to a number of servers **102** through a wireless access network **104**. As will be understood by those of skill in the art, **Fig. 1** is a simplified overview of a wireless network configuration. Typically, a server **102**, or terminal **100** in the case of terminal-terminal communications, sends data to the wireless access network **104**. The wireless access network **104** schedules and formats the data for transmission over a radio link **106** to a terminal **100**.
25 Wireless access network **104** typically includes one or more base stations, or hubs, including suitable processing means and radio frequency hardware, as is well known to those of skill in the art. A scheduler **108**, within the wireless access network **104**, determines which packets are to be sent in a next frame. An access network radio link protocol (RLP) engine **110**, in the data link layer, then encapsulates the data packets as RLP frames for transmission to
30 appropriate terminals **100**, and determines appropriate ARQ parameters.

The system and method of the present invention presume that the network is enabled for packet-based applications. As used herein, the terminal **100** can be any suitable wireless device, such as a cellular telephone or other wireless device enabled for packet-based applications, such as access to the World Wide Web and file transfer. The applications provided by application servers **102** can, if desired, support multiple users simultaneously, and multiple applications can be supported for each user or terminal **100**. The payload data is provided to the link layer as packets by the application layer. It is assumed that the packets so received include information relating to their per packet QoS. The per packet QoS can be based on, for example, each packet's acceptable packet loss rate, packet delay bound and/or other packet parameters. As used herein, packet delay bound is the acceptable delay in the wireless link for a given packet. For example, a higher priority (i.e. higher QoS) could be given to packets from real time applications than to packets from non-real time applications if the per packet QoS was based on packet delay bound.

Fig. 2 is a more detailed block diagram of the wireless access network **104** and a terminal **100**, including the RLP engine **110** of the present invention. Data packets are received from the application layer destined to particular users or terminals **100**. The packets are received by a packet classification unit **202** from the application layer, and classified into appropriate per packet QoS classes. In the illustrated example, a user A has packets in three different per packet QoS classes, while a user B has packets in two. The packet classification unit **202** classifies each packet according to its respective per packet QoS class, and stores the packets in buffer(s) **204** while they await transmission. Each user can have separate queues for each per packet QoS class (as shown), a single queue can be set up for each terminal, or other appropriate packet queuing can be implemented. The scheduler **108** schedules the packets according to a predetermined scheduling algorithm. In a presently preferred embodiment, the scheduling algorithm takes into consideration the per packet QoS of each packet. In a presently preferred embodiment, the scheduler **108** receives channel condition information from each terminal, from which it can determine an appropriate link mode for each channel. The scheduled packets are then passed to the RLP engine **110**, where they are encapsulated as RLP frames, as is well known those of skill in the art. RLP engine **110** also includes an ARQ engine **206** that determines and maintains appropriate retransmission parameters for each scheduled packet, as will be further described below. Retransmission

buffers **208** are maintained by ARQ engine **206** in the event that packets require retransmission. As indicated, RLP engine **110** and scheduler **108** share certain information, including the per packet QoS, identification of packets that must be retransmitted, and other information, as is known to those of skill in the art.

5 Generally, the ARQ engine **206** operates as follows. For each packet that is scheduled for transmission, the total number of available retransmissions N over a given wireless link is determined. The total number N can, for example, be estimated as a function the wireless link QoS. The transmitter side ARQ engine **206** maintains a retransmission counter k , which is initially set to N .

10 If a NAK message is received at the access network **104** from a terminal RLP **212** indicating that retransmission is required for a packet P_i , the transmitter side ARQ engine **206** checks the packet's delay margin. The packet delay margin is a measure of time that the packet can remain in the wireless link. In a presently preferred embodiment, the packet delay margin can be calculated by subtracting the current system time from the packet's finish time, which is a function of its arrive time in the wireless access network and its packet delay bound. If the packet's delay margin permits more than one retransmission round as determined from an estimated round trip time (RTT) between the receiver and transmitter, the erred packet is retransmitted once, and the retransmission counter is updated to $k=k-1$. If the packet's delay margin only permits one more retransmission round, then up to k retransmissions are made.

15 As shown in Fig. 2, in a presently preferred embodiment, the ARQ engine **206** consists of a number of logical ARQs **210** for each user, corresponding to each per packet QoS class determined by the packet classification unit **202**. Generally, the appropriate QoS classes are communicated to the peer ARQ **210** at initialization. Each logical ARQ **210** is released at state transitioning out from active state of a terminal **100**.

20 The particular format of the NAK message received by the wireless access network **104** is not critical to this invention. Generally, the information contained within the NAK message includes an identification of an erred packet(s) for which retransmission is requested. The information contained within the NAK message generally includes a sequence number identifying the erred packet, plus general control information. The actual frame format design for the NAK message depends on the physical layer design of the network.

Alternatively, the present invention can be implemented for wireless access networks that are acknowledgement (ACK) based. In such a case, as is well known to those of skill in the art, the receiver sends an ACK message for each properly received packet. The transmitter tracks the receipt of the ACK messages, and retransmits packets for which no ACK has been received within a certain time, or after receipt of subsequent ACK messages. Such non-receipt of an ACK message can be seen to be equivalent to receipt of a NAK message.

Referring to **Figs. 2 and 3**, the operation of the present invention will now be described in greater detail. The description that follows focuses on the purely layer 2 (L2) ARQ within wireless access network **104**. As mentioned above a logical RLP ARQ **210** is created for each per packet QoS class. At initialization, the sender side logical RLP **210** sends corresponding QoS parameters, such as packet delay bound, to the receiver side RLP **212** for each per packet QoS class. As packets arrive at the access network RLP **110**, the scheduler **108** labels each packet with a finish time. The scheduled packet is then processed by its appropriate RLP ARQ **210**. The RLP ARQ **210** stores the packet's finish time, and determines the total number of retransmissions N for the packet based on the wireless link QoS and the packet loss rate. The RLP ARQ **210** maintains a retransmission counter k , initially set to N .

In a presently preferred embodiment, the finish time is the sum of the packet's arrive time in the wireless access network **104** and its packet delay bound, as determined by the packet's membership in a particular per packet QoS class. The finish time provides the latest time by which the packet must be received at its destination terminal. As determined at initialization, a L2 round trip time (RTT) is also estimated for the link between the wireless access network **100** and each terminal **100**.

As shown in **Fig. 3**, a number of packets **A, B, C, D.....** are being sent from a transmitter side, typically the wireless access network **104**, to a receiver side, typically a terminal **100**. For purposes of illustration, each packet has a per packet QoS that imposes a packet delay bound of, for example, 3 s. The packet loss rate for the wireless link is 10^{-4} , and the required FER is 10^{-1} . It is assumed that each packet is encapsulated in a single RLP frame. Therefore, the total number of retransmissions available for each packet can be estimated as $N=3$. Packet **A** is sent, but not received at the receiver side. A NAK message **NAK1A** is then sent from the receiver side to the sender side. Whenever the access network

RLP 110 receives a NAK message for a particular packet, or part of a packet, the packet's delay margin is calculated. In the illustrated example, the delay margin for packet A is greater than 1.5 times the estimated RTT, therefore there is at least one more opportunity to retransmit the packet, and the logical ARQ 210 generates retransmission parameters to effect a single retransmission of packet A in this retransmission round. The retransmission counter k, initially set to $k=N=3$, is then decremented by "1" to $k=2$.

The retransmitted packet A is also not received at the sender side, and a second NAK message NAK2A is sent to the sender side. On receipt of NAK2A the delay margin for packet A is again calculated, and is found to be less than 1.5 times the estimated RTT. Therefore, in order to meet the packet's per packet QoS, only one last retransmission round is possible and retransmission parameters are determined such that all remaining retransmissions are sent in this last available retransmission round. The remaining number of retransmissions is equal to the current value of retransmission counter k. Therefore, since $k=2$, two retransmissions of packet A are made in this final round. If the packet's finish time has expired, no retransmissions are made.

The dynamic ARQ of the present invention does not significantly increase retransmit complexity, but improves system capacity by selectively limiting the number of retransmissions in a retransmission round. The adaptive ARQ of the present invention provides an optimal design with increased system efficiency by avoiding unnecessary retransmissions and providing more reliable QoS support by matching retransmission parameters with real time packet delay margin. This design is applicable to, and significantly enhances 3G systems such as cdma2000, UMTS and HDR. It is also applicable to future high-speed wireless systems, whether fixed or mobile.

The above-described embodiments of the present invention are intended to be examples only. Alterations, modifications and variations may be effected to the particular embodiments by those of skill in the art without departing from the scope of the invention, which is defined solely by the claims appended hereto.

What is claimed is:

1. A method for retransmitting packets in a wireless communications network, comprising:

(a) receiving a retransmission request for a packet having available at least one retransmission rounds and a number of retransmissions;

(b) determining, from the at least one retransmission rounds and the number of retransmissions, retransmission parameters for the packet;

(c) retransmitting the packet at the determined retransmission parameters; and

(d) updating the number of retransmissions.

2. The method as in claim 1, wherein receiving the retransmission request includes receiving a negative acknowledgement message.

3. The method as in claim 1, wherein determining the retransmission parameters includes determining that a packet delay margin permits more than one retransmission rounds.

4. The method as in claim 3, wherein retransmitting the packet includes retransmitting one instance of the packet.

5. The method as in claim 1, wherein determining the retransmission parameters includes determining that a packet delay margin permits only one retransmission round.

6. The method as in claim 5, wherein retransmitting the packet includes retransmitting the instances of the packet equal to the number of retransmissions.

7. The method of claim 1, further including estimating a total number of retransmissions.

8. The method of claim 7, wherein estimating the total number of retransmissions includes considering a wireless link quality of service and a packet loss rate.

9. A radio link protocol engine for providing retransmission parameters for a packet in response to an automatic retransmission request; comprising:

a buffer for storing retransmission parameters for a packet having a predetermined per packet quality of service;

5 a radio link protocol automatic retransmission request engine for determining the retransmission parameters for the packet as a function of the predetermined per packet quality of service and a wireless link quality of service.

10 10. The radio link protocol engine of claim 9, wherein the radio link protocol automatic retransmission request engine estimates a total number of retransmissions for the packet from the wireless link quality of service.

11. The radio link protocol engine of claim 9, wherein the radio link protocol automatic retransmission request engine estimates a number of available retransmission rounds for the packet.

12. The radio link protocol engine of claim 9, wherein the retransmission parameters include a number of retransmissions for a retransmission round .

13. The radio link protocol engine of claim 9, wherein the radio link protocol automatic retransmission request engine includes a retransmission counter.

14. A wireless access network, comprising:

a scheduler for scheduling a packet, having a predetermined per packet quality of service, for transmission over a radio link having a predetermined wireless link quality of service;

a radio link protocol engine for providing retransmission parameters for the packet in response to an automatic retransmission request, the radio link protocol engine including a buffer for storing retransmission parameters for the packet; and a radio link protocol automatic retransmission request engine for determining the retransmission parameters for

the packet as a function of the predetermined per packet quality of service and the predetermined wireless link quality of service.

15. The wireless access network of claim 14, wherein the radio link protocol automatic
5 retransmission request engine estimates a total number of retransmissions for the packet from the wireless link quality of service.

16. The wireless access network of claim 14, wherein the radio link protocol automatic
10 retransmission request engine estimates a number of available retransmission rounds for the packet.

17. The wireless access network of claim 14, wherein the retransmission parameters
include a number of retransmissions for a retransmission round .

18. The wireless access network of claim 14, wherein the radio link protocol engine
15 automatic retransmission request engine includes a retransmission counter.

ABSTRACT

A method and system for providing dynamic ARQ, on a per packet basis, in a wireless telecommunications access network. By taking into consideration both per packet QoS based on, for example, packet delay bound, and potential delays caused by retransmission, a dynamic NAK-based ARQ scheme is presented that dynamically adapts the retransmission parameters to the per packet QoS to provide improved radio link quality, particularly for non-delay sensitive services and applications. The ARQ parameters that are dynamically adjusted can include the number of retransmission rounds, and the number of retransmissions in each round.

00722338 142800
008211 8322760

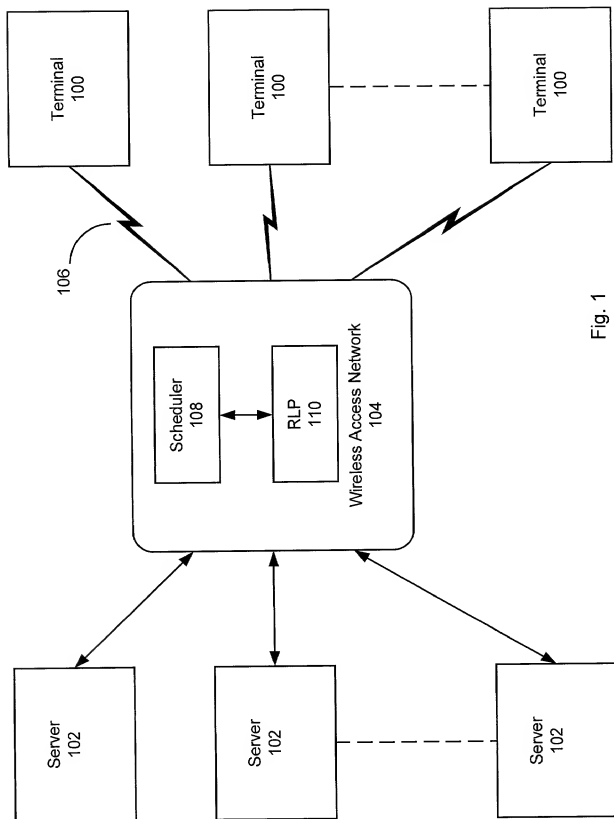


Fig. 1

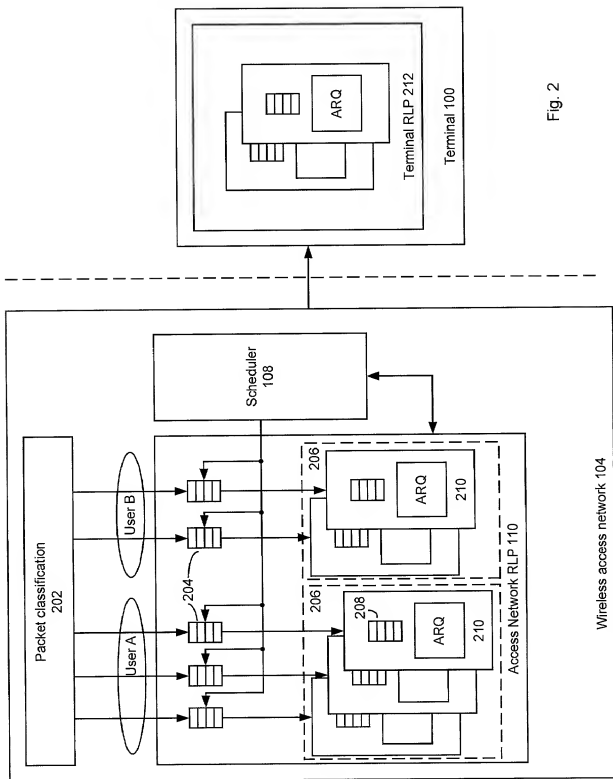


Fig. 2

Wireless access network 104

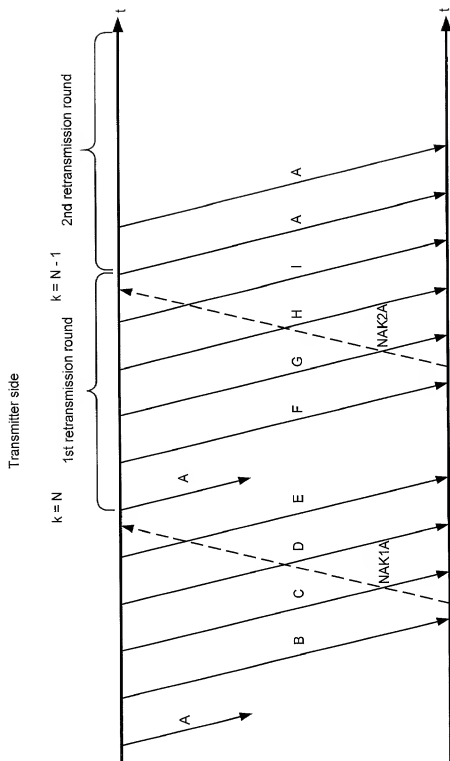


Fig. 3

DECLARATION AND POWER OF ATTORNEY

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are stated below next to my name.

I believe I am the original, first, and sole inventor (if only one name is listed below) or an original, first, and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

TITLE OF INVENTION

DYNAMIC AUTOMATIC RETRANSMISSION REQUEST IN WIRELESS ACCESS NETWORKS

the specification of which is attached hereto.

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with 37 CFR §1.56.

I hereby claim foreign priority benefits under 35 U.S.C. §119(a)-(d) or §365(b) of any foreign application(s) for patent or inventor's certificate, or §365(a) of any PCT international application which designated at least one country other than the United States, listed below and have also identified below any foreign application for patent or inventor's certificate or PCT International application having a filing date before that of the application on which priority is claimed:

PRIOR FOREIGN/PCT APPLICATION(S)

COUNTRY/OFFICE	APPLICATION NO.	DATE OF FILING	PRIORITY CLAIMED
			<input type="checkbox"/> YES <input type="checkbox"/> NO
			<input type="checkbox"/> YES <input type="checkbox"/> NO

I hereby claim the benefit under 35 U.S.C. §119(e) of any United States provisional application(s) listed below.

PROVISIONAL APPLICATION NUMBER**DATE OF FILING**

00722338.112000

I hereby claim the benefit under 35 U.S.C. §120 of any United States application(s) or §365(c) of any PCT International application(s) designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of 35 U.S.C. §112, I acknowledge the duty to disclose material information as defined in 37 CFR §1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application:

**PRIOR U.S. APPLICATIONS OR PCT INTERNATIONAL APPLICATIONS
DESIGNATING THE U.S. FOR BENEFIT UNDER 35 U.S.C. §120**

Status (check one)

Application Serial No.	Date of Filing	Patented	Pending	Abandoned
		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

POWER OF ATTORNEY

I hereby appoint the practitioners at Customer No. 26123, as my attorneys or agents with full power of substitution and revocation, to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith.

Address all correspondence to Customer No. 26123.



26123

PATENT, TRADEMARK OFFICE

Address all telephone calls to Anne Kinsman (613) 237-3160 (telex: 613-787-3558).

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issuing thereon.

1. FULL NAME OF SOLE OR FIRST INVENTOR

Hang	ZHANG	
(GIVEN NAME)	(MIDDLE INITIAL OR NAME)	(FAMILY OR LAST NAME)
Inventor's signature:		
Date:	November 24, 2000	
Country of Citizenship:	China	
Residence:	Nepean	Ontario, Canada
	(City)	(State or Foreign Country)
Post Office Address:	24 Gardengate Way, Nepean, Ontario, K2G 5Z1, Canada	

2. FULL NAME OF SECOND INVENTOR

Mo-Han PONG
(GIVEN NAME) (MIDDLE INITIAL OR NAME) (FAMILY OR LAST NAME)
Inventor's signature: [Signature]
Date: Nov. 27, 2000
Country of Citizenship: Canada
Residence: L'Original Ontario, Canada
(City) (State or Foreign Country)
Post Office Address: 1578 Bay Road, L'Original, Ontario, K0B 1K0, Canada

3. FULL NAME OF THIRD INVENTOR

Shalini S. PERIYALWAR
(GIVEN NAME) (MIDDLE INITIAL OR NAME) (FAMILY OR LAST NAME)
Inventor's signature: [Signature]
Date: Nov 24, 2000
Country of Citizenship: Canada
Residence: Ottawa Ontario, Canada
(City) (State or Foreign Country)
Post Office Address: 71 Russell Avenue East, Ottawa, Ontario, K1N 7X2, Canada